

Asymptotic size of covering arrays: an application of entropy compression

Nevena Francetić
School of Mathematical Sciences
Monash University
Victoria 3800, Australia
nevena.francetic@monash.edu

Brett Stevens
School of Mathematics and Statistics
Carleton University
Ottawa, ON K1S 5B6 Canada
brett@math.carleton.ca *

January 15, 2015.

Abstract

A covering array $CA(N; t, k, v)$ is an $N \times k$ array A whose each cell takes a value for a v -set V called an alphabet. Moreover, the set V^t is contained in the set of rows of every $N \times t$ subarray of A . The parameter N is called the size of an array and $CAN(t, k, v)$ denotes the smallest N for which a $CA(N; t, k, v)$ exists. It is well known that $CAN(t, k, v) = \Theta(\log_2 k)$ [8]. In this paper we derive two upper bounds on $d(t, v) = \limsup_{k \rightarrow \infty} \frac{CAN(t, k, v)}{\log_2 k}$ using the algorithmic approach to the Lovász local lemma also known as entropy compression.

1 Introduction

A covering array $CA(N; t, k, v)$ is an $N \times k$ array A whose cells take values from a set V of size v and the set of rows of every $N \times t$ subarray of A contains the whole set V^t . The parameter t is called the strength, the parameter v is the alphabet size and N is called the size of the array. A covering array with given parameters t , k and v always exists. The two central questions regarding covering arrays are: what the smallest number of rows is, denoted by $CAN(t, k, v)$, for which a covering array with the given set of parameters (t, k, v) exists, and how an array of such size can be constructed. In this paper we study the upper bounds on the asymptotic size of covering arrays. It is easy to see that if $t = 1$ or $v = 1$, covering arrays are trivial. Hence we assume that $t \geq 2$ and $v \geq 2$.

Covering arrays are best known for their applications in the software testing industry [13, 15] as interaction testing plans. There are numerous software tools for construction of covering arrays [5], and there is a vast literature on them as well [2, 10, 13, 14]. However, the central question about the optimal size is far from fully answered. The only infinite family of covering arrays whose exact size is known is the first non-trivial family of arrays of strength $t = 2$ and with alphabet size $v = 2$ [11, 12]. The best known upper bound on the size of a covering array for any set of parameters (t, k, v) is obtained by an application of the Lovász local lemma [7]. Together these two results give us the asymptotic size of covering arrays when strength t and alphabet size v are fixed and the number of columns k is varied.

*Research supported by NSERC grant 249777.

Theorem 1. [8, 11, 12] *Let $t, v \geq 2$ be integers. Then,*

$$CAN(t, k, v) = \Theta(\log_2 k).$$

Given the previous theorem, there is significant interest in determining the following two values (we use the notation given in [14]):

$$c(t, v) = \liminf_{k \rightarrow \infty} \frac{CAN(t, k, v)}{\log_2 k} \quad \text{and} \quad d(t, v) = \limsup_{k \rightarrow \infty} \frac{CAN(t, k, v)}{\log_2 k}.$$

The exact value of $d(t, v)$ is only known when $t = 2$.

Theorem 2. [7] *Let $v \geq 2$ be an integer. Then $d(2, v) = \frac{v}{2}$.*

However, covering arrays which meet this asymptotic size are hard to construct. The only family which we currently know how to construct which attains this size is the already mentioned family of CA s with $t = 2$ and $v = 2$ [11, 12].

In 1996, Godbole et. al. [8] gave an upper bound on $d(t, v)$ for any strength $t \geq 2$.

Theorem 3. [8] *Let $t \geq 2$ and v be positive integers. Then,*

$$d(t, v) \leq \frac{(t-1)}{\log_2 \frac{v^t}{v^t-1}}.$$

Recently, the method of entropy compression was successfully used in the context of vertex-colourings of graphs [6, 9] to improve on the previous results which used the local lemma. In this paper we explore an application of this method in the context of covering arrays. We give a new upper bound on $d(t, v)$ for any $t \geq 3$ in Theorem 13, which improves Theorem 3. We also obtain a tighter upper bound on $d(t, v)$ given in Lemma 14 which depends on further computational approximations. Table 1 displays our new upper bounds on $d(t, v)$ for $2 \leq t \leq 6$ and $2 \leq v \leq 10$. Finally, we analyze these results and point out possible challenges and further avenues for improvement.

2 Algorithm

We adapt the algorithms given in [6, 9] to covering arrays. The algorithm is used as a tool for counting. The main idea is to keep a record of execution for the algorithm. This allows us to match an input sequence to the algorithm injectively with a pair consisting of the output array and the record of the execution. For a given input, we say that the execution was *unsuccessful* and that it produced a *bad* output if, the output array is only partially filled and has some empty columns. If the total number of possible input sequences is greater than the total number of bad output pairs, then there must exist an input sequence for which the algorithm successfully terminates. Before we give the algorithm, we need to introduce some notation which is required for the analysis.

Given array parameters N, t, k and v , the algorithm attempts to construct a covering array of size $N \times k$ one column at a time. A column of a $CA(N; t, k, v)$ is an element of V^N , where V is the alphabet set of size v . To remind us that these ordered N -tuples are columns, we denote elements of V^N by c . Let $\mathcal{S} \subseteq V^N$ denote a set of all admissible input columns for the algorithm. We will define $\mathcal{S}$ in Section 5. Then the algorithm receives as an input value $I \in \mathcal{S}^\ell$, a sequence of ℓ columns, where ℓ is the number of iterations to be performed. Let $I(j)$ denote the j^{th} coordinate of I .

At an intermediate step in the algorithm, some columns of the array may still be empty. Let $\emptyset$ denote an empty column, and let $\mathcal{S}' = \mathcal{S} \cup \{\emptyset\}$. Then, an array can be represented as

a sequence of k elements of $\mathcal{S}'$, i.e. $A = (c_1, c_2, \dots, c_k)$, where $c_i \in \mathcal{S}'$. Let $A(i) = c_i$ be the values in the i^{th} column of the array. We also require a way to choose which column to fill at each step. Define $\varphi(A)$ to be the priority function on the empty columns of A :

$$\varphi(A) = \begin{cases} -1, & \text{if there is no empty column in } A, \\ \min\{i : A(i) = \emptyset\}, & \text{otherwise.} \end{cases}$$

The key property of a covering array is that the subarray on any t columns contains each t -tuple in V^t at least once. Let $\mathcal{T}$ be the set of all t -subsets of the set $[1, k] = \{1, 2, \dots, k\}$. Let $\tau = \{i_1, i_2, \dots, i_t\} \in \mathcal{T}$, where $i_1 < i_2 < \dots < i_t$. Then denote by $A|_\tau = (c_{i_1}, c_{i_2}, \dots, c_{i_t})$ the subarray of A on columns indexed by τ . An auxiliary function **is a covering**($A|_\tau$) returns true if the set of rows of $A|_\tau$ contains V^t as a subset, and false otherwise.

Now we are ready to describe the algorithm which attempts to construct a $CA(N; t, k, v)$ for some positive integers N, t, k and v . It starts by initializing all columns of an $N \times k$ array A to be empty, and opens a new record file R . Then it runs for ℓ iterations where ℓ is the length of the input sequence. The partially constructed array A satisfies the covering property at the beginning of each iteration. At a step j , let i be smallest index of an empty column of A . The algorithm assigns to the i^{th} column the j^{th} element of the input sequence. Now, if A has an $N \times t$ subarray on columns $\tau \subset [1, k]$, which is not a covering, then $i \in \tau$ since A met the covering property before algorithm entered the j^{th} iteration. The algorithm records $\hat{\tau} = \tau \setminus \{i\}$ and the content of the subarray of A on columns in τ . Note, in order to be able to recover input from the output, we need to know the relative position of i with respect to other elements in $\hat{\tau}$ since i is not recorded. Hence the elements of τ are first sorted in increasing order. Finally, since this subarray does not have the covering property, we assign empty values to the columns in τ . Otherwise, the addition of a new column to A preserves the covering property and the algorithm completes this iteration after recording a successful entry to the file.

Note that the number of lines in the record file R is equal to the number of executed iterations. If the algorithm completes and the array A has no empty columns, then it is easy to see that A satisfies the covering property on every set of t -columns, i.e. it is a covering array. Otherwise, A is only partially constructed, it has some empty columns, and we say that the

execution of the algorithm on the given input was unsuccessful.

Data: $I \in \mathcal{J}^\ell$ where $\mathcal{J} \subset V^N$

Result: a (partial) covering array $CA(N; t, k, v)$

$A := (\emptyset, \emptyset, \dots, \emptyset)$

$R := \text{new file}()$

for $j := 1$ **to** ℓ **do**

$i := \varphi(A)$

if $i == -1$ **then**

 | break

end

else

$A(i) := I(j)$

$good := \text{true}$

for all $\tau \in \mathcal{T}$ **do**

if $i \in \tau$ **and** $A|_\tau$ *has no empty columns* **then**

$good := \text{is a covering}(A|_\tau)$

if $good == \text{false}$ **then**

 // omit i from τ

$\text{sort}(\tau)$

 // so that $\tau(r_1) < \tau(r_2)$ when $r_1 < r_2$

$(i_1, i_2, \dots, i_t) := \tau$

$h := \text{index of } i \text{ in } \tau$

 // i.e. $i_h = i$

$\hat{\tau} := (i_1, i_2, \dots, i_{h-1}, i_{h+1}, \dots, i_t)$ // i.e. $\hat{\tau} = \tau \setminus \{i\}$

 // record the content of $A|_\tau$ and delete these columns

$(c_1, c_2, \dots, c_t) := (A(i_1), A(i_2), \dots, A(i_t))$

$A|_\tau := (\emptyset, \emptyset, \dots, \emptyset)$

$R.\text{write}(\text{'back-track - in columns:'}, \hat{\tau}, \text{' deleted content: '},$

$(c_1, c_2, \dots, c_t), \text{'\n'})$

break // break the loop over $\tau \in \mathcal{T}$

end

end

end

if $good == \text{true}$ **then**

 | $R.\text{write}(\text{'successful entry '\n'})$

end

end

end

return (A, R)

Algorithm 1: Entropy compression algorithm for construction of a $CA(N; t, k, v)$

3 Reversibility

Next, we establish bijection between the set of all possible inputs $\mathcal{J}^\ell$ and the set of all possible outputs $\mathcal{O}_\ell = \{(A, R) : \text{obtained by the algorithm on an input } I \in \mathcal{J}^\ell\}$. It is easy to see that for an input sequence $I \in \mathcal{J}^\ell$, we get only one output (A, R) . We prove the converse in several steps. Let A_j denote the state of the array A at the beginning of the j^{th} iteration of Algorithm 1. Hence, A_1 is an empty array, and $A_{\ell+1} = A$, the array returned by the algorithm.

Lemma 4. *Given $(A, R) \in \mathcal{O}_\ell$, we can determine the set of indices of all columns which are empty in A_j for all $j \in \{1, 2, \dots, \ell\}$.*

Proof. We use induction on j . Denote by $\mathcal{E}_j$ the set of all indices of columns which are empty in A_j . When $j = 1$, $\mathcal{E}_1 = [1, k]$, since the algorithm starts with an empty array A_1 .

Assume that we know $\mathcal{E}_j$ for some $j < \ell$. Then, $i = \min \mathcal{E}_j = \varphi(A_j)$ is the index of a column which receives a value in the j^{th} iteration. If the j^{th} line of R starts with ‘successful entry’, then $\mathcal{E}_{j+1} = \mathcal{E}_j \setminus \{i\}$. Otherwise, the j^{th} line of R contains $\hat{\tau} = \tau \setminus \{i\}$, where τ is the set of columns whose content is removed at step j . Hence, $\mathcal{E}_{j+1} = \mathcal{E}_j \cup \hat{\tau}$. $\square$

The following is an immediate corollary.

Corollary 5. *We can determine $\varphi(A_j)$ for all $j \in [1, \ell]$ from an output of the algorithm $(A, R) \in \mathcal{O}_\ell$.*

Next, we determine A_j at each step of the algorithm from the output values.

Lemma 6. *Given $(A, R) \in \mathcal{O}_\ell$, we can deduce A_j for all $j \in [1, \ell + 1]$.*

Proof. The proof is by reverse induction. When $j = \ell + 1$, $A_j = A$, the output of the algorithm. Assume that we know A_{j+1} for some $j < \ell$. By Corollary 5, we know $i = \varphi(A_j)$. We have two cases to consider. If the j^{th} line of R starts with ‘successful entry’, then A_j is obtained by deleting the content of column i in A_{j+1} . Otherwise, the j^{th} line of R contains $\hat{\tau}$, indices of all but one of the columns whose content is deleted at step j of the algorithm. It also has the content of all t of these columns, $(c_{i_1}, c_{i_2}, \dots, c_{i_t}) \in V^t$, where $\hat{\tau} \cup \{i\} = \{i_1, i_2, \dots, i_t\}$ such that $i_{r_1} < i_{r_2}$ when $r_1 < r_2$. Then A_j is obtained from A_{j+1} after the following assignment: $A_{j+1}(i_r) = c_{i_r}$ for all $r \in [1, t]$. $\square$

Finally, we are ready to prove the reversibility: given an output, we can obtain the unique input sequence for the algorithm.

Lemma 7. *Given $(A, R) \in \mathcal{O}_\ell$, there is a unique input sequence $I \in \mathcal{I}^\ell$, such that Algorithm 1 produces (A, R) on input I .*

Proof. The proof is by induction on ℓ . If $\ell = 1$, then $I = A(1)$. Assume that the statement is true for some $\ell \geq 1$. Let $(A, R) \in \mathcal{O}_{\ell+1}$ and denote by I the desired input sequence. Let R' be the record R without the last line. By Lemma 6, we know the value of $A_{\ell+1}$ and $(A_{\ell+1}, R') \in \mathcal{O}_\ell$. By our assumption, there is a unique input sequence $I' \in \mathcal{I}^\ell$ such that the algorithm gives $(A_{\ell+1}, R')$ on input I' . Then $I(j) = I'(j)$ for $j \in [1, \ell]$. It remains to determine $I(\ell + 1)$.

If the last line of R is ‘successful entry’, then it must be that $I(\ell + 1) = A(\varphi(A_{\ell+1}))$, where $\varphi(A_{\ell+1})$ is given by Corollary 5. Otherwise, the last line of R contains $\hat{\tau}$ and $(c_1, c_2, \dots, c_t)$. As before, let $\hat{\tau} \cup \{\varphi(A_{\ell+1})\} = \{i_1, i_2, \dots, i_t\}$, where $i_{r_1} < i_{r_2}$ when $r_1 < r_2$. Let h be such that $\varphi(A_{\ell+1}) = i_h$. Then we have that $I(\ell + 1) = c_h$ which is uniquely determined. $\square$

4 Algorithm analysis

In Section 3 we established a bijection between the total number of inputs $\mathcal{I}^\ell$ and outputs $\mathcal{O}_\ell$ of Algorithm 1. Next, we want to show that when a given set of covering array parameters satisfies certain conditions and ℓ is big enough, the total number of inputs to the algorithm is greater than the set of outputs which have exactly ℓ lines in the record file (which correspond to unsuccessful executions). Hence, the algorithm will successfully terminate and output a covering array with desired parameters for some input sequence.

We start by finding an upper bound on the size of $\mathcal{R}_\ell$, the set of all possible record files R with ℓ lines which can be output from Algorithm 1. Let ℓ_0 be the number of ‘successful entry’ lines, and ℓ_1 be the number of ‘back-track’ lines. Then $\ell = \ell_0 + \ell_1$ and these lines can be

positioned in the record file in $\binom{\ell}{\ell_0} = \binom{\ell}{\ell_0, \ell_1}$ ways. Denote by C_1 the number of distinct pairs $(\hat{\tau}, (c_1, c_2, \dots, c_t))$ which can appear in a ‘back-track’ line. Then

$$|\mathcal{R}_\ell| = \sum_{\substack{(\ell_0, \ell_1) \\ \ell_0 + \ell_1 = \ell}} \binom{\ell}{\ell_0, \ell_1} C_1^{\ell_1}.$$

Now, we can apply the following result from [9].

Theorem 8. [9, Corollary 19.] *Let ℓ and p be positive integers. Let $s_i \in \mathbb{Z}^+$ and $C_i > 1$, $C_i \in \mathbb{R}$, for $i \in [1, p]$. Define B_ℓ to be*

$$B_\ell(\ell_0, \ell_1, \dots, \ell_p) = \binom{\ell}{\ell_0, \ell_1, \dots, \ell_p} \prod_{i=1}^p C_i^{s_i},$$

where ℓ_i is a non-negative integer, $i \in [0, p]$, $\sum_{i=0}^p \ell_i = \ell$ and $\ell \geq \sum_{i=1}^p s_i \ell_i$. Then

$$\sum_{(\ell_0, \ell_1, \dots, \ell_p)} B_\ell(\ell_0, \ell_1, \dots, \ell_p) < \ell(\ell+1)^p \left(\inf_{0 < x \leq 1} Q(x) \right)^\ell,$$

where

$$Q(x) = \frac{1}{x} \left(1 + \sum_{i=1}^p C_i x^{s_i} \right).$$

Corollary 9. *Let C_1 be the number of distinct pairs $(\hat{\tau}, (c_1, c_2, \dots, c_t))$ which can be recorded in a ‘back-track’ line in an execution of Algorithm 1. Then,*

$$|\mathcal{R}_\ell| < \ell(\ell+1) \left(\frac{t}{t-1} (t-1)^{\frac{1}{t}} C_1^{\frac{1}{t}} \right)^\ell.$$

Proof. We apply Theorem 8 with $p = 1$ and we only need to determine the value of s_1 . Note that the algorithm cannot back-track unless there are t non-empty columns in A . Since the total number of added columns in A is ℓ , one at each iteration, and the total number of deleted columns is $t\ell_1$, we have that $\ell \geq t\ell_1$. Thus, let $s_1 = t$. Now taking the first derivative of $Q(x)$ to get the minimum, the result follows. $\square$

Finally, we give a lemma which is going to be our main tool in further analysis.

Lemma 10. *Given positive integers N , t , k and v , and a set $\mathcal{S} \subseteq V^N$, where $|V| = v$, there exists a $CA(N; t, k, v)$ whose columns are elements of the set $\mathcal{S}$ if*

$$\left(\frac{t}{t-1} \right)^t (t-1) C_1 < |\mathcal{S}|^t,$$

where C_1 the number of distinct pairs $(\hat{\tau}, (c_1, c_2, \dots, c_t))$ which can be recorded in a ‘back-track’ line in an execution of Algorithm 1.

Proof. Denote by $\overline{\mathcal{O}}_\ell = \{(A, R) : R \in \mathcal{R}_\ell\} \subseteq \mathcal{O}_\ell$, the subset of all possible outputs of the algorithm which have exactly ℓ lines in the record file R . Since an output array A has k columns each of which is either empty or in $\mathcal{S}$, we have that

$$\begin{aligned} |\overline{\mathcal{O}}_\ell| &\leq (|\mathcal{S}| + 1)^k |\mathcal{R}_\ell| \\ &< (|\mathcal{S}| + 1)^k \ell(\ell+1) \left(\frac{t}{t-1} (t-1)^{\frac{1}{t}} C_1^{\frac{1}{t}} \right)^\ell && \text{(by Corollary 9)} \\ &= O \left(\left(\frac{t}{t-1} (t-1)^{\frac{1}{t}} C_1^{\frac{1}{t}} \right)^\ell \right) && \text{(as a function of } \ell). \end{aligned}$$

Note that $C_1 = C_1(N, t, k, v)$, and hence it is a constant with respect to ℓ . Therefore, by the assumption of the lemma, for sufficiently large ℓ , we have that $|\overline{\mathcal{O}}_\ell| < |\mathcal{J}|^\ell$, and $|\mathcal{J}|^\ell$ equals the total number of possible inputs of length ℓ for the algorithm. Since, $|\mathcal{O}_\ell| = |\mathcal{J}|^\ell$ by Lemma 7, there exists an input on which the algorithm terminates in less than ℓ iterations and hence outputs a $CA(N; t, k, v)$. $\square$

In the following section, we apply Lemma 10 to derive an upper bound on asymptotic size of covering arrays.

5 Balanced covering arrays of any strength t

To demonstrate how Lemma 10 can be applied, we start with an easy example for a construction of a covering array of arbitrary strength. The main difficulty in the application of Lemma 10 is to give a good upper bound on the value of C_1 . In Section 6, we will strengthen the general result in the cases when $t = 2$ and $t = 3$.

Recall that C_1 equals the number of distinct pairs $(\hat{\tau}, (c_1, c_2, \dots, c_t))$ which may appear in a ‘back-track’ line in the record file of Algorithm 1 for a parameter set $(N; t, k, v)$. The ‘back-track’ line is recorded only when the array $(c_1, c_2, \dots, c_t)$ is not a proper cover. Hence,

$$C_1 = \binom{k}{t-1} \cdot |\mathcal{A}_t|,$$

where $\mathcal{A}_t$ is the set of all $N \times t$ arrays on the alphabet set V of size v , such that for every array in $\mathcal{A}_t$ there is at least one element of V^t which is not contained in the set of rows of the array.

Taking the input set $\mathcal{J} = V^N$ to be equal to the set of all possible N -tuples on alphabet V , we can easily obtain the upper bound on the size of a covering array using Lemma 10 which is almost identical to the one derived using Lovász local lemma [8]. This bound is improved if instead we take $\mathcal{J}$ to be the set of balanced columns: N -tuples in which every alphabet symbol appears equal number of times. Hence, from now on, we will assume that $N = mv$ for some m , and $\mathcal{J}$ is the set of balanced columns. Therefore, $|\mathcal{J}| = \binom{mv}{m, m, \dots, m}$. A *balanced* covering array, is a covering array whose columns are elements of $\mathcal{J}$.

We also require some approximations of the binomial coefficient which we use in the subsequent sections.

Lemma 11. [16, Theorems 2.6. and 2.8.] *Let $m, v \in \mathbb{Z}$, $v \geq 2$ and $m \geq 2$. Then*

$$l(v) m^{-1/2} \frac{v^{vm}}{(v-1)^{(v-1)m}} < \binom{mv}{m} < u(v) m^{-1/2} \frac{v^{vm}}{(v-1)^{(v-1)m}},$$

where

$$l(v) = \frac{e^{15/16}}{\sqrt{2\pi}} \left(\frac{v-1}{v}\right)^{(v-1)} \quad \text{and} \quad u(v) = \frac{1}{\sqrt{2\pi}} \left(\frac{v}{v-1}\right)^{1/2}.$$

Lemma 12. [4] *For any positive integer $n > m$*

$$\binom{n}{m} < 2^{nh(\frac{m}{n})},$$

where $h(x) = -x \log_2(x) - (1-x) \log_2(1-x)$ for $0 < x < 1$.

We will apply Lemma 11 for parameters v and m , where v denotes the alphabet size and m denotes the number of occurrences of each symbol within a column. Recall that covering arrays are trivial when either $v = 1$ or $t = 1$. Also, for any covering array, an obvious lower

bound is $N = mv \geq v^t$, so $m \geq v^{t-1} \geq v$ for all $t \geq 2$. Hence, the conditions of Lemma 11 always hold for non-trivial parameter sets.

Our first application of Lemma 10 is for the most general case when the strength of a covering array is any positive integer $t \geq 2$.

Theorem 13. *Let t and v be positive integers, $t, v \geq 2$. Then*

$$d(t, v) \leq \frac{v(t-1)}{\log_2 \left(\frac{v^{t-1}}{v^{t-1}-1} \right)}.$$

Proof. Let V be the alphabet set. Let $k \geq t$ and m be positive integers and $\mathcal{J} \subset V^{mv}$ be the set of balanced columns. Since $C_1 = \binom{k}{t-1} |\mathcal{A}_t|$, if m is such that

$$\frac{\left(\frac{t}{t-1}\right)^t (t-1) \cdot k^{t-1} \cdot |\mathcal{A}_t|}{|\mathcal{J}|^t} < 1, \quad (5.1)$$

then by Lemma 10, there exists a balanced $CA(mv; t, k, v)$.

Now,

$$|\mathcal{A}_t| < v^t \cdot |\mathcal{J}| \cdot (v^{t-1} - 1)^m \cdot (v^{t-1})^{m(v-1)}.$$

Indeed, if $A \in \mathcal{A}_t$, then the following properties hold.

- There are v^t choices for an element $(a_1, a_2, \dots, a_t) \in V^t$ which is not covered by rows of A .
- The first column of A can be any element of the input set $\mathcal{J}$.
- The m rows of A having a_1 in the first column cannot contain the ordered $(t-1)$ -tuple $(a_2, a_3, \dots, a_t)$ in the remaining cells.
- All other rows of the array obtained from A by removing the first column can contain any element of V^{t-1} .

By Lemma 11,

$$|\mathcal{J}| = \binom{mv}{m, m, \dots, m} = \binom{mv}{m} \binom{m(v-1)}{m} \dots \binom{2m}{m} > \left(\prod_{i=2}^v l(i) \right) m^{-\frac{v-1}{2}} v^{vm},$$

hence

$$\frac{\left(\frac{t}{t-1}\right)^t (t-1) \cdot k^{t-1} \cdot |\mathcal{A}_t|}{|\mathcal{J}|^t} < M(v, t) k^{t-1} m^{\frac{(v-1)(t-1)}{2}} \left(\frac{v^{t-1} - 1}{v^{t-1}} \right)^m, \quad (5.2)$$

where $M(v, t) = \left(\frac{t}{t-1}\right)^t (t-1) v^t \left(\prod_{i=2}^v l(i) \right)^{1-t}$.

For fixed covering array parameters (t, k, v) , the right hand side of inequality (5.2) is a function of m and its dominant term is exponential with base smaller than 1. Let m be the smallest positive integer for which the right hand side of inequality (5.2) is smaller than 1. Then inequality (5.1) is satisfied, and so there exists a balanced $CA(mv; t, k, v)$. Since m is the smallest such integer, it follows that inequality (5.1) does not hold for $m-1$, that is

$$M(v, t) k^{t-1} (m-1)^{\frac{(v-1)(t-1)}{2}} \left(\frac{v^{t-1} - 1}{v^{t-1}} \right)^{(m-1)} \geq 1.$$

Taking the logarithm of both sides, we get

$$\limsup_{k \rightarrow \infty} \frac{m}{\log_2 k} \leq \frac{t-1}{\log_2 \left(\frac{v^{t-1}}{v^{t-1}-1} \right)}.$$

Note that $\lim_{k \rightarrow \infty} \frac{\log_2 m}{\log_2 k} = 0$ by Theorem 1. Finally, since $CAN(t, k, v)$ is at most the size of a balanced $CA(t, k, v)$, we get an upper bound on $d(t, v)$. $\square$

6 Tighter bound on $d(t, v)$

The main difficulty in computing the value of C_1 is counting the $N \times t$ arrays over an alphabet set V which are not covering arrays. We can obtain a multivariable function in $t - 2$ variables to approximate C_1 from above. When $t = 2$ and 3 , we get exact bounds, and for higher values of t we obtain these bounds using mathematical software for non-linear optimization.

For the purposes of the following lemma, let $f_{t,v}$ be the following function on domain $(0, 1)^{t-1}$:

$$f_{t,v}(x_1, x_2, \dots, x_{t-1}) = \log_2 \frac{(v - x_{t-1})^{(v-x_{t-1})}}{(v-1-x_{t-1})^{(v-1-x_{t-1})} x_{t-1}^{x_{t-1}}} + \sum_{i=1}^{t-2} \log_2 \left(\frac{(v - x_i)^{(v-x_i)}}{(v-1-x_i+x_{i+1})^{(v-1-x_i+x_{i+1})} (x_i - x_{i+1})^{(x_i-x_{i+1})} (1-x_{i+1})^{(1-x_{i+1})}} \right).$$

Lemma 14. *Let $t \geq 2$ and v be positive integers and*

$$f_0(t, v) = \max_{1=x_1 \geq x_2 \geq \dots \geq x_{t-1} \geq 0} f_{t,v}(x_1, x_2, \dots, x_{t-1}).$$

Then $d(2, 2) = 1$ and when $tv > 4$,

$$d(t, v) \leq \frac{(t-1)v}{(t-1) \left(\log_2 \frac{v^v}{(v-1)^{v-1}} \right) - f_0(t, v)}.$$

Proof. As before, let V be the alphabet set of size v . Let k be an integer, $k \geq t$. We need to bound the size of $\mathcal{A}_t$. A set of rows of $A \in \mathcal{A}_t$ does not contain a t -tuple in V^t , which we denote by $(a_1, a_2, \dots, a_t) \in V^t$. Next we count the number of occurrences of the 1-tuple (a_1) in the first column of A , the number of occurrences of the 2-tuple (a_1, a_2) in the first two columns of A , and so on. Let $0 \leq x_i \leq 1$ be such that the subarray of A restricted to columns 1 through i contains exactly mx_i rows $(a_1, a_2, \dots, a_i)$, where $i \in [1, t]$. We know that $x_1 = 1$ and $x_t = 0$ since the columns of A are balanced and does not cover $(a_1, a_2, \dots, a_i)$. Also, note that $x_i \geq x_{i+1}$ for all i .

The first column of A can be chosen arbitrarily. Any other column $i \geq 2$, contains mx_i cells with value a_i within mx_{i-1} rows which contain $(a_1, a_2, \dots, a_{i-1})$ in the previously chosen columns. Hence, the i^{th} column of A can be completed in at most $\binom{mx_{i-1}}{mx_i} \binom{m(v-x_{i-1})}{m(1-x_i)} \binom{m(v-1)}{m, m, \dots, m}$ ways.

If $(t, v) \neq (2, 2)$, using Lemmas 11 and 12, we get

$$\begin{aligned} \frac{\left(\frac{t}{t-1}\right)^t (t-1) \cdot k^{t-1} \cdot |\mathcal{A}_t|}{|\mathcal{J}|^t} &< \left(\frac{t}{t-1}\right)^t (t-1) \cdot k^{t-1} \frac{\left(\prod_{i=2}^{t-1} \binom{mx_{i-1}}{mx_i} \binom{m(v-x_{i-1})}{m(1-x_i)}\right) \binom{m(v-x_{t-1})}{m}}{\binom{mv}{m}^{t-1}} \\ &< \left(\frac{t}{t-1}\right)^t (t-1) \cdot k^{t-1} \frac{2^{mf_{t,v}(x_1, x_2, \dots, x_{t-1})}}{l(v)^{t-1} m^{-(t-1)/2} \left(\frac{v^v}{(v-1)^{v-1}}\right)^{m(t-1)}} \\ &< \frac{\left(\frac{t}{t-1}\right)^t (t-1) m^{(t-1)/2}}{l(v)^{t-1}} \cdot k^{t-1} \left(\frac{2^{f_0(t,v)}}{\left(\frac{v^v}{(v-1)^{v-1}}\right)^{(t-1)}} \right)^m, \end{aligned} \quad (6.1)$$

where

$$f_{t,v}(x_1, \dots, x_{t-1}) = \left(\sum_{i=2}^{t-1} x_{i-1} h\left(\frac{x_i}{x_{i-1}}\right) + (v - x_{i-1}) h\left(\frac{1 - x_i}{v - x_{i-1}}\right) \right) + (v - x_{t-1}) h\left(\frac{1}{v - x_{t-1}}\right).$$

In the last inequality, the dominant term is an exponential function of m . Following the same reasoning as in the proof of Theorem 13, we get an upper bound on $d(t, v)$.

Using the definition of the entropy function h , one can write $f_{t,v}$ in the form given above. Also note that $x_1 = 1$, so it is a dummy variable for $f_{t,v}$.

If $(t, v) = (2, 2)$, since $x_1 = 1$ and $x_2 = 0$, there is $\binom{m}{0}\binom{m}{0}\binom{m}{m} = 1$ choice for the second column and hence $|\mathcal{A}_t| = |\mathcal{S}|$. Note that this is the only case for which we get the exact count of the number of $N \times t$ arrays which are not coverings of strength t . Using Lemma 11,

$$\frac{\left(\frac{t}{t-1}\right)^t (t-1) \cdot k^{t-1} \cdot |\mathcal{A}_t|}{|\mathcal{S}|^t} < \frac{4k}{\binom{2m}{m}} < \frac{4m^{1/2} \cdot k}{l(2) \cdot 2^{2m}}.$$

As before, taking the smallest m for which the right hand-side of the last inequality is smaller than m , it follows that $d(2, 2) \leq 1$, which is the exact value of $d(2, 2)$ [11, 12]. $\square$

Observe that $f_{2,v}$ is a constant function since $x_1 = 1$, and $f_{3,v}$ is a single variable function so we can easily obtain its maximum taking the first derivative of $f_{3,v}$. The same result can be obtained using Lovász local lemma directly [17].

Corollary 15. *Let v be a positive integer, $v \geq 2$. Then $d(2, 2) = 1$ and*

$$d(2, v) \leq \frac{v}{\log_2 \left(\frac{v^v (v-2)^{v-2}}{(v-1)^{2(v-1)}} \right)}, \text{ when } v \geq 3.$$

Corollary 16. *Let $v \geq 2$ be an integer. Then*

$$d(3, v) \leq \frac{2v}{\log_2 \left(\frac{v^{2v} (v-1-\xi)^{(v-1-\xi)} \xi^\xi (v-2-\xi)^{(v-2-\xi)} (1-\xi)^{2(1-\xi)}}{(v-1)^{3(v-1)} (v-\xi)^{(v-\xi)}} \right)},$$

where $\xi = \frac{1}{2}(1 + v - \sqrt{v^2 + 2v - 3})$.

Proof. The function

$$f_{3,v}(1, x_2) = \log_2 \frac{(v-x_2)^{(v-x_2)}}{(v-1-x_2)^{(v-1-x_2)} x_2^{x_2}} + \log_2 \frac{(v-1)^{(v-1)}}{(v-2+x_2)^{(v-2+x_2)} (1-x_2)^{2(1-x_2)}}$$

is maximum at $\xi = \frac{1}{2}(1 + v - \sqrt{v^2 + 2v - 3}) < 1$. It is straightforward to apply Lemma 14. $\square$

For $t \geq 4$, $f_{t,v}$ is a multivariable function. We used a successive quadratic programming solver in Octave to compute $f_0(t, v)$. Table 1 gives values of $d(t, v)$ obtained in Corollaries 15 and 16 and by computational optimization for $4 \leq t \leq 6$.

7 Analysis of results

Theorem 13 provides a new upper bound on $d(t, v)$ for any t . This bound is an improvement on the current best general upper bound on $d(t, v)$ derived in [8]. To see this, recall that $\ln(1 + \frac{1}{x}) = \frac{1}{x} - \frac{1}{2x^2} + o(\frac{1}{x^2}) = \frac{1}{x + \frac{x}{2x-1}} + o(\frac{1}{x^2}) \approx \frac{1}{x + \frac{1}{2}}$ for $|x| \gg 1$. Hence, for a fixed value of t ,

$$\frac{(t-1)}{\log_2 \frac{v^t}{v^{t-1}}} \approx (t-1) \left(v^t - \frac{1}{2} \right) \ln(2) \quad \text{and} \quad \frac{(t-1)v}{\log_2 \left(\frac{v^{t-1}}{v^{t-1}-1} \right)} \approx (t-1) \left(v^t - \frac{v}{2} \right) \ln(2).$$

$v \setminus t$	2	3	4	5	6
2	1	7.56	27.32	79.74	209.13
3	3.97	32.03	158.65	658.21	2503.83
4	8.16	81.35	518.55	2816.81	14162.67
5	13.72	163.91	1281.78	8635.15	54108.77
6	20.65	288.03	2672.98	21523.56	161643.64
7	28.98	462.05	4966.64	46555.89	407676.24
8	38.68	694.28	8487.15	90802.26	908447.35
9	49.78	993.05	13608.84	163661.74	1841749.21
10	62.25	1366.68	20755.89	277195.09	3465640.41

Table 1: Upper bounds on $d(t, v)$.

The better upper bound on $|\mathcal{A}_t|$ obtained in Section 6 yields the most improvement when $t = 2$ since over-counting is the least in this case. As above, we can easily approximate the bound obtained in Corollary 15 to get

$$\frac{v}{\log_2 \left(\frac{v^v (v-2)^{v-2}}{(v-1)^{2(v-1)}} \right)} = \frac{v \ln(2)}{v \ln \left(\frac{v}{v-1} \right) - (v-2) \ln \left(\frac{v-1}{v-2} \right)} \approx \frac{v(v - \frac{1}{2})(v - \frac{3}{2})}{(v-1)} \ln(2) < v(v-1) \ln(2).$$

Hence, we get a tighter bound on $d(2, v)$. However, note that the upper bound on $d(2, v)$ for $v \geq 3$ given in Corollary 15 still quadratic in v , which is the same as the bound given in Theorem 13. Recall, $d(2, v) = \frac{v}{2}$ [7]. Hence, even for the strength is $t = 2$, the obtained upper bound on $d(2, v)$ is far from optimal. However, Algorithm 1 provides one major improvement to previous asymptotic constructions: when $t = 2$ and $v = 2$ we are able to compute the exact size of $\mathcal{A}_t$, which gives us that $d(2, 2) = 1$ in Corollary 15. This indicates that Algorithm 1 might potentially yield asymptotically optimal covering arrays. But the current approximation the size of $\mathcal{A}_t$, the set of $N \times t$ arrays with balanced columns which are not coverings, introduces substantial overcounting even in the easiest case when strength $t = 2$. To see this in a different way, consider the examples of upper bounds on $d(2, v)$ given in Table 2. We can see the improvements on the upper bounds on $d(2, v)$ obtained in Theorem 13 and Corollary 15 compared to Theorem 3. The fourth row of Table 2 corresponds to a bound obtained by the following simple construction. Let $\mathcal{V}$ be a collection of all 2-subsets of an alphabet set V of size v . Then a $CA(2, k, v)$ on alphabet set V can be constructed by juxtaposing $\binom{v}{2}$ isomorphic copies of a $CA(2, k, 2)$ on alphabet set V' for every $V' \in \mathcal{V}$. Since $d(2, 2) = 1$, we get $d(2, v) \leq \frac{v(v-1)}{2} < v(v-1) \ln(2)$, giving improvement to the general bound on $d(2, v)$ obtained by Corollary 15. More advanced direct constructions of covering arrays of strength $t = 2$, especially when v is a prime power, provide covering arrays which yield even smaller bounds on $d(2, v)$ which are still quadratic in v (for example, see [3]). The fifth row of Table 2 gives the slope of least square regression line for the set of pairs $(\log_2 k, N)$ such that N is the smallest size for which a $CA(N; 2, k, v)$ is currently known (as given in tables in [1]). We can see that these values are still far away from the optimal asymptotic size given in the last row of Table 2, with the exception of $v = 2$.

We have seen that Theorem 13 provides an improvement on the upper bound for $d(t, v)$ compared to the current best known result stated in Theorem 3 for any value of t . However, the improvement obtained is comparatively small as t increases (for example, see Table 3). On the other hand, the upper bounds obtained here predict the existence of covering arrays with smaller size that what is currently known. Indeed, Algorithm 1 terminates and outputs a proper covering array when (5.1) is satisfied. That means that for a given t, k and v , if m is such that the value in (6.1) is smaller than 1, a $CA(vm; t, k, v)$ exists. Figure 1 plots the current


$d(2, v) \setminus v$	2	3	4	5	6	7	8	9	10
Theorem 3	2.41	5.89	10.74	16.98	24.61	33.62	44.01	55.80	68.97
Theorem 13	2.0	5.13	9.64	15.53	22.81	31.48	41.53	52.96	65.79
Corollary 15	1	3.97	8.16	13.72	20.65	28.98	38.68	49.78	62.25
$\binom{v}{2}$	1	3	6	10	15	21	28	36	45
slope of regression	1.02	2.84	5.15	7.935	11.83	15.49	19.55	21.99	25.83
Theorem 2	1	1.5	2	2.5	3	3.5	4	4.5	5

Table 2: Comparison of upper bounds on $d(2, v)$.


best known sizes of covering arrays with $t = 6$, and $v = 2$ or $v = 7$ given in [1] against the sizes of covering arrays for which (6.1) is smaller than 1. We can see that for small values of k , the current, predominately computational results, are producing covering arrays of smaller size. However, for large values of k we are predicting the existence of covering arrays with much smaller number of rows.

$d(6, v) \setminus v$	2	3	4	5	6	7
Theorem 3	220.07	2524.79	14193.92	54150.39	161695.64	407738.63
Theorem 13	218.32	2521.32	14188.72	54143.46	161686.98	407728.23
Table 1	209.13	2503.83	14162.67	54108.77	161643.64	407676.24

Table 3: Comparison of upper bounds on $d(6, v)$.

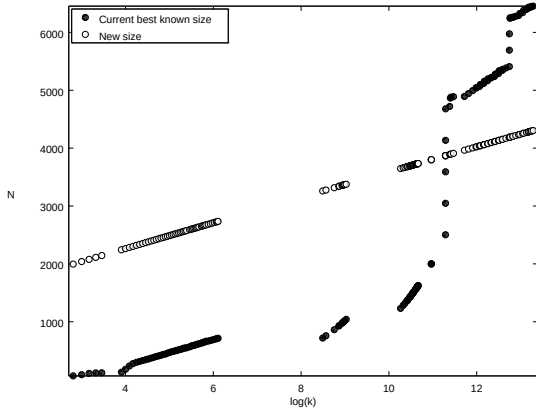

(a) CAs with $t = 6$ and $v = 2$.

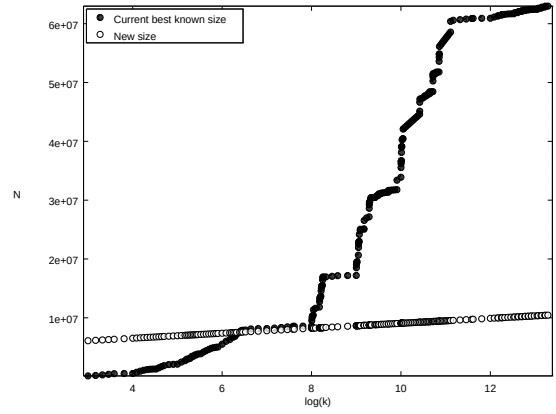

(b) CAs with $t = 6$ and $v = 7$.

Figure 1: Comparison of sizes of covering arrays which can be constructed by Algorithm 1 with currently best known sizes.

8 Conclusion

Determining the optimal size of a covering array for a given triple (t, k, v) and constructing optimal covering arrays have been two central questions in this area of research. The interest in these two questions stems from the fact that covering arrays are natural models for interaction test suites and hence they are extensively used in the blooming software testing industry. However, these two questions have proven to be a great challenge for both combinatorial and computer science research communities.

In this paper we tackled the problem of determining the upper bounds on the asymptotic size of covering arrays using an algorithmic version of the local lemma. We determined a new general bound on $d(t, v)$ (see Theorem 13) and we gave a tighter bound in Lemma 14 which depends on further numerical computation.

However, though we are improving the existing upper bounds on the asymptotic size of covering arrays for strength $t \geq 3$, in the simplest case when $t = 2$ (and the over-counting is the least), the bounds we are obtaining are far from the optimal predicted by Theorem 2. The main challenge in improving these bounds is finding a better way to count the number of balanced arrays on t columns which are not t -coverings. A new view to this problem may lead to better encrypting of information in the ‘back-track’ lines in the algorithm. Indeed, in the case when $t = 2$ and $v = 2$, we are able to count these arrays exactly and as a result this general algorithm produces covering arrays whose size is asymptotically optimal.

9 Acknowledgments

We sincerely thank Marni Mishna and Steve Melczer for many insightful discussions on enumeration techniques.

References

- [1] Charles Colbourn, *Covering array tables for $t = 2, 3, 4, 5, 6$* , 2014. Accessed on Aug 16, 2014.
- [2] Charles J Colbourn, *Combinatorial aspects of covering arrays*, Le Matematiche **59** (2004), no. 1-2, 125–172.
- [3] Charles J Colbourn, Sosina S Martirosyan, Gary L Mullen, Dennis Shasha, George B Sherwood, and Joseph L Yucas, *Products of mixed covering arrays of strength two*, Journal of Combinatorial Designs **14** (2006), no. 2, 124–138.
- [4] Imre Csiszár and János Körner, *Information theory: Coding theorems for discrete memoryless systems*, 2nd ed., Cambridge University Press, 2011.
- [5] Jacek Czerwinka, *Pairwise testing: Combinatorial test case generation*, 2014. Accessed on Oct 23, 2014.
- [6] Vida Dujmović, Gwenaél Joret, Jakub Kozik, and David R. Wood, *Nonrepetitive colouring via entropy compression*, Combinatorica (accepted in 2013).
- [7] L. Gargano, J. Körner, and U. Vaccaro, *Sperner capacities*, Graphs and Combinatorics **9** (1993), no. 1, 31–46.
- [8] Anant P Godbole, Daphne E Skipper, and Rachel A Sunley, *t -covering arrays: upper bounds and poisson approximations*, Combinatorics, Probability and Computing **5** (1996), no. 2, 105–117.
- [9] Daniel Gonçalves, Mickaël Montassier, and Alexandre Pinlou, *Entropy compression method applied to graph colorings* (June 17, 2014), available at [arXiv:1406.4380](https://arxiv.org/abs/1406.4380). Accessed on July 13, 2014.
- [10] Alan Hartman and Leonid Raskin, *Problems and algorithms for covering arrays*, Discrete Mathematics **284** (2004), no. 1-3, 149–156.
- [11] G. O. H. Katona, *Two applications (for search theory and truth functions) of sperner type theorems*, Periodica Mathematica Hungarica. Journal of the János Bolyai Mathematical Society **3** (1973), 19–26.

- [12] Daniel J. Kleitman and Joel Spencer, *Families of k -independent sets*, Discrete Mathematics **6** (1973), 255–262.
- [13] D. Richard Kuhn, Raghu N. Kacker, and Yu Lei, *Introduction to combinatorial testing*, 1st ed., Chapman & Hall/CRC, 2013.
- [14] Jim Lawrence, Raghu N. Kacker, Yu Lei, D. Richard Kuhn, and Michael Forbes, *A survey of binary covering arrays*, Electron. J. Combin. **18** (2011), no. 1, P84.
- [15] Changhai Nie and Hareton Leung, *A survey of combinatorial testing.*, ACM Comput. Surv. **43** (2011), 1–29.
- [16] Pantelimon Stănică, *Good lower and upper bounds on binomial coefficients*, JIPAM. J. Inequal. Pure Appl. Math. **2** (2001), no. 3, Paper No. 30, 5 p., electronic only.
- [17] Ruyue Yuan, Zoe Koch, and Anant Godbole, *Covering array bounds using analytical techniques* (May 12, 2014), available at [arXiv:1405.2844](https://arxiv.org/abs/1405.2844). Accessed on Oct 23, 2014.